




Cable routing and mounting systems

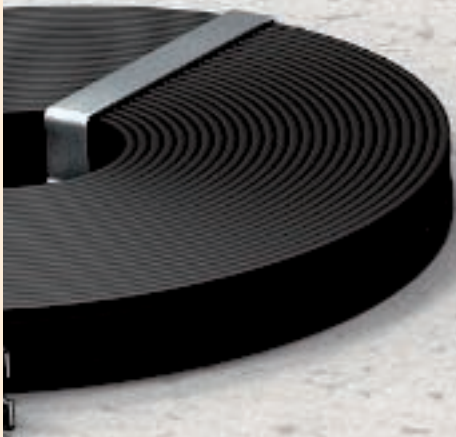

Cable routing and mounting systems

	Cable tie	284
	Tightening strap	286
	Slotted steel strap	288
	Ribbon conductor bonding agent	289
	Tensioning wire	290
	Installation strip	294

Jack of all trades.

Bundling cables

Suspending
and securing

Mounting
and fastening

Cable tie

- Large variety
- UV-resistant



Ribbon clips

- UV-resistant
- Single and double lock
- Stainless steel version



Tightening strap

- High load capacity
- Coils and fixed lengths
- Special tool available



Tensioning wire

- High loading capacity
- Diverse range



Installation strip

- Wide range of application options
- Convenient packaging
- Various materials



Cable tie, white



Type	Dim.	Dim.	Dim.	Colour	Pack.	Weight	Item No.
	B	L	t				
	mm	mm	mm		pcs	kg/100 pcs.	
565 2.5x75 WS	2.5	75	1	White	100	0,020	2331 80 0
565 2.5x100 WS	2.5	100	1	White	100	0,025	2331 81 0
565 2.5x150 WS	2.5	150	1.3	White	100	0,047	2331 81 6
565 2.5x200 WS	2.5	200	1.3	White	100	0,062	2331 82 2
565 3.6x150 WS	3.6	150	1.4	White	100	0,070	2331 83 0
565 3.6x200 WS	3.6	200	1.4	White	100	0,104	2331 83 6
565 3.6x290 WS	3.6	290	1.4	White	100	0,140	2331 84 2
565 3.6x365 WS	3.6	365	1.4	White	100	0,183	2331 84 8
565 4.8x120 WS	4.8	120	1.5	White	100	0,089	2331 86 0
565 4.8x160 WS	4.8	160	1.6	White	100	0,120	2331 86 6
565 4.8x200 WS	4.8	200	1.6	White	100	0,149	2331 87 2
565 4.8x300 WS	4.8	300	1.6	White	100	0,201	2331 87 8
565 4.8x365 WS	4.8	365	1.5	White	100	0,251	2331 88 4
565 4.8x430 WS	4.8	430	1.5	White	100	0,288	2331 89 0
565 7.6x200 WS	7.6	200	1.8	White	100	0,287	2331 91 0
565 7.6x300 WS	7.6	300	1.6	White	100	0,334	2331 91 6
565 7.6x380 WS	7.6	380	2	White	100	0,533	2331 92 2
565 8x450 WS	8	450	1.9	White	100	0,717	2331 93 4
565 9x760 WS	9	760	2	White	100	1,311	2331 94 4

PA Polyamide /100 pc.

Cable ties are used for quick, uncomplicated fixing or bundling of cables and pipes to cable support systems or other mounting structures.

Cable tie, black, UV and weather-resistant



Type	Dim.	Dim.	Dim.	Colour	Pack.	Weight	Item No.
	B	L	t				
	mm	mm	mm		pcs	kg/100 pcs.	
565 2.5x75 SWUV	2.5	75	1	Black	100	0,020	2331 80 2
565 2.5x100 SWUV	2.5	100	1	Black	100	0,025	2331 81 2
565 2.5x150 SWUV	2.5	150	1.3	Black	100	0,047	2331 81 8
565 2.5x200 SWUV	2.5	200	1.3	Black	100	0,062	2331 82 4
565 3.6x150 SWUV	3.6	150	1.4	Black	100	0,070	2331 83 2
565 3.6x200 SWUV	3.6	200	1.4	Black	100	0,104	2331 83 8
565 3.6x290 SWUV	3.6	290	1.4	Black	100	0,140	2331 84 4
565 3.6x365 SWUV	3.6	365	1.4	Black	100	0,183	2331 85 0
565 4.8x120 SWUV	4.8	120	1.5	Black	100	0,089	2331 86 2
565 4.8x160 SWUV	4.8	160	1.6	Black	100	0,120	2331 86 8
565 4.8x200 SWUV	4.8	200	1.6	Black	100	0,149	2331 87 4
565 4.8x300 SWUV	4.8	300	1.6	Black	100	0,201	2331 88 0
565 4.8x365 SWUV	4.8	365	1.5	Black	100	0,251	2331 88 6
565 4.8x430 SWUV	4.8	430	1.5	Black	100	0,288	2331 89 2
565 7.6x200 SWUV	7.6	200	1.8	Black	100	0,287	2331 91 2
565 7.6x300 SWUV	7.6	300	1.6	Black	100	0,334	2331 91 8
565 7.6x380 SWUV	7.6	380	2	Black	100	0,533	2331 92 4
565 8x450 SWUV	8	450	1.9	Black	100	0,717	2331 93 6
565 9x760 SWUV	9	760	2	Black	100	1,311	2331 94 6

PA Polyamide /100 pc.

Cable ties are used for quick, uncomplicated fixing or bundling of cables and pipes to cable support systems or other mounting structures.

Ribbon clip, 6 mm-wide



Type	Dimension mm	Max. bundle Ø mm	Minimum breaking load kN	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
550 6X180 SW	6 x 180	45	0.25	Black	100	0,180	2330 05 9
550 6X290 SW	6 x 290	78	0.25	Black	100	0,300	2330 07 5
550 6X360 SW	6 x 360	100	0.25	Black	100	0,380	2330 09 1
550 9X180 SW	9 x 180	40	0.35	Black	100	0,270	2330 22 9

PA Polyamide

/100 pc.

Design E, single lock, UV and weather-resistant.



Ribbon clip, 9 mm-wide



Type	Dimension mm	Max. bundle Ø mm	Minimum breaking load kN	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
550 9X265 SW	9 x 260	65	0.51	Black	100	0,420	2330 24 5
550 9X360 SW	9 x 360	93	0.51	Black	100	0,560	2330 29 6
550 9X510 SW	9 x 510	140	0.55	Black	100	0,930	2330 32 6
550 9X760 SW	9 x 760	220	0.55	Black	100	1,350	2330 34 2

PA Polyamide

/100 pc.

Design D, double lock, UV and weather-resistant.



Metal strip clips, narrow

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MBS 015	150	100	0,230	7203 10 0
MBS 030	300	100	0,399	7203 10 2
MBS 045	450	50	0,602	7203 10 4
MBS 061	610	50	0,806	7203 10 6

V2A Stainless steel, grade 304

/100 pc.

Metal strip clip in ladder form with single lock. For high-temperature and weatherproof fixing.



Metal strip clips, wide

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MBS 075	750	25	2,300	7203 10 8
MBS 100	1000	25	3,000	7203 11 0
MBS 120	1200	25	3,600	7203 11 2
MBS 150	1500	25	4,400	7203 11 4

V2A Stainless steel, grade 304

/100 pc.

Metal strip clip in ladder form with single lock. For high-temperature and weatherproof fixing.



Tightening strap

Tightening strap



Type	Dimension mm	Minimum breaking load kN	Colour	Pack. m	Weight kg/100 m	Item No.
574 G STGR	17 x 1,2	1.35	Stone grey	25	5,880	6490 01 8

St Steel
G Electrogalvanised

price/100 m

Galvanised tightening strap and with plastic covering for fastening on cable trays and ladders.

Tightening strap V2A




Type	Dimension mm	Minimum breaking load kN	Colour	Pack. m	Weight kg/100 m	Item No.
574 03 LBL	17 x 1,2	2.25	Light blue	25	6,950	6490 03 4
574 05 PGN	17 x 1,2	3.5	Patina green	25	7,120	6490 05 0

V2A Stainless steel, grade 301

price/100 m

Tightening strap made of stainless steel and with plastic covering for fastening on cable trays and ladders.

Tightening strap lock




Type	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
192	1200	100	0,900	6490 90 5

St Steel
DD Strip galvanised zinc/aluminium, Double Dip

/100 pc.

Tightening strap lock for mounting under the ceiling.

Tightening strap lock V2A



Type	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
197 VA4301	1800	100	0,560	6490 96 4

V2A Stainless steel, grade 304

/100 pc.

Tightening strap lock for single-sided locking of tightening strap in problematic areas.

Tightening strap in fixed lengths



Type	Dimension mm	Length mm	Minimum breaking load kN	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
574 03 30 LBL	17 x 1,2	300	2.25	Light blue	25	2,410	6490 10 7
574 03 45 LBL	17 x 1,2	450	2.25	Light blue	25	3,260	6490 12 3
574 05 55 PGN	17 x 1,2	550	3.5	Patina green	25	4,660	6490 15 8
574 05 65 PGN	17 x 1,2	650	3.5	Patina green	25	5,370	6490 17 4

V2A Stainless steel, grade 301

/100 pc.

Tightening strap, 574, completely pre-assembled with tightening strap lock.

Type

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
575	1	29,700	6498 01 9


St Steel

/pc.

For tightening strap 574/...

Mounting of the tightening strap:

1. Cut the strap to the right length, push it through the lock and turn it over.
2. Loop the strap around the cable, push the loose end through the lock.
3. Tighten the end of the strap with the pliers.
4. Turn the end of the taut strap with the pliers. Remove the pliers.
5. Completely turnover the turned end of the strap with the hammer, secure the end of the strap by hitting the two standing lobes of the lock.

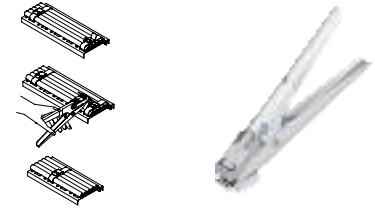
Chuck tool**Type**

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
576	1	132,000	6498 02 7

St Steel


/pc.

For tightening strap 574/...

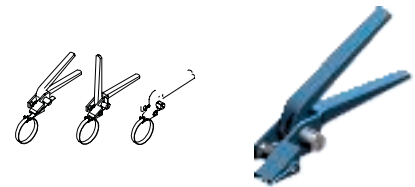Chuck tool

Slotted steel strap

Slotted steel strap, rods



Type	Dimension mm	Hole size mm	Length mm	per bundle m	Pack. pcs	Weight kg/100 pcs.	Item No.
5050 25X3 1M FT	25 x 3	6,5 x 40	1000	60	20	47,000	1466 54 2
5050 20X3 3M FT	20 x 3	6,5 x 40	3000	60	60	35,000	1465 76 7
5050 25X3 3M FT	25 x 3	6,5 x 40	3000	60	60	47,000	1465 77 5
5050 30X3 3M FT	30 x 3	6,5 x 40	3000	60	60	59,000	1465 79 1
5050 30x3 3M FT	30 x 3	6,5 x 40	3000	60	60	73,000	1465 26 7
5050 30X4 3M FT	30 x 4	8,5 x 60	3000	30	30	54,000	1465 80 5
5050 40X4 3M FT	40 x 4	8,5 x 70	3000	30	30	101,000	1465 82 1


St Steel

FT Hot-dip galvanised

/100 pc. price/100 m

Perforated slotted steel strap in strips.

Slotted steel strap, rings



Type	Dimension mm	Pack. m	Weight kg/100 m	Item No.
5050 20x1.5 BK	20 x 1,5	200	18,000	1465 60 0


St Steel

BK Bright

price/100 m

In rings.

Suspension chain



Type	Breaking load kN	Pack. m	Weight kg/100 m	Item No.
K-C30 G	0.7	25	10,000	1488 20 1


St Steel

G Electrogalvanised

price/100 m

To suspend luminaire supports or other components.

S hook



Type	Breaking load kN	Pack. pcs	Weight kg/100 pcs.	Item No.
SH 40 G	0.5	100	0,800	1488 25 2

St Steel

G Electrogalvanised

/100 pc.

Connecting book of support clamps and suspension chains.

Solvent mixture

Contents		Pack. Weight		Item No.
Type	ml	pcs	kg/100 pcs.	
508	1000	1	105,000	2341 10 7

/pc.



Thinning.
Solvent mixture to create an optimum processing consistency of Impu-Fix ribbon conductor quick adhesive and to clean the working material.

Impu-Fix ribbon conductor quick adhesive

Contents		Pack. Weight		Item No.
Type	kg	pcs	kg/100 pcs.	
509	0.65	1	70,000	2341 01 8

/pc.




Impu-Fix ribbon conductor bonding agent to stick clips and ribbon conductors to masonry and concrete.

Ceiling outlet



Colour		Pack. Weight		Item No.
Type		pcs	kg/100 pcs.	
510	Light grey	100	0,290	2236 02 8


PS Polystyrene /100 pc.



To fasten ribbon conductors.



Steel wire tensioning rope



Type	Cable diameter mm	Breaking load kN	In rings m	Pack. m	Weight kg/100 m	Item No.
957 2 G	2	2.35	50	50	1,430	5303 20 2
957 3 G	3	5.29	50	50	3,220	5303 20 6
957 4 G	4	9.41	50	50	5,720	5303 21 4
957 5 G	5	14.7	50	50	8,940	5303 22 2
957 6 G	6	21.1	50	50	12,900	5303 23 0
957 8 G	8	34.8	50	50	22,900	5303 25 7
957 10 G	10	54.4	50	50	35,700	5303 26 5
957 2 V4A	2	2.35	50	50	1,430	5303 17 9
957 3 V4A	3	5.29	50	50	3,220	5303 18 2
957 4 V4A	4	9.41	50	50	5,720	5303 18 5
957 5 V4A	5	14.7	50	50	8,940	5303 18 8
957 6 V4A	6	21.1	50	50	12,900	5303 19 1
957 8 V4A	8	34.8	50	50	22,900	5303 19 4
957 10 V4A	10	54.4	50	50	35,700	5303 19 7

St Steel V4A Stainless steel, grade 316

price/100 m

G Electrogalvanised


Steel wire tensioning rope, galvanised with fibre inlay (hemp core).

Cable Ø 2–6 mm: round-stranded cable 6 x 7 according to DIN 3055.

Cable Ø 8–10 mm: round-stranded cable 6 x 19 according to DIN 3060.

Minimum break force 1770 N/mm².

Tension jack



Type	Thread	Dim. A mm	Dim. B mm	Dim. C mm	Breaking load kN	Pack. pcs	Weight kg/100 pcs.	Item No.
945 M6 G	M6	9	8.5	110	2.25	5	13,050	5300 03 7
945 M10 G	M10	14	13.5	125	7	5	33,650	5300 05 3
945 M12 G	M12	16	15.5	125	7.5	5	53,000	5300 06 1
945 M16 G	M16	22	19	170	12	5	84,000	5300 08 8
945 M6 V4A	M6	9	8.5	110	2.25	5	10,500	5300 12 0
945 M10 V4A	M10	14	13.5	125	7	5	28,000	5300 12 4
945 M12 V4A	M12	16	15.5	125	7.5	5	42,000	5300 12 7
945 M16 V4A	M16	22	19	170	12	5	100,000	5300 13 2


St Steel V4A Stainless steel, grade 316

/100 pc.

G Electrogalvanised

With hook and eye, to DIN 1480.

Cable eye stiffener



Type	For rope-Ø mm	Dim. A mm	Dim. B mm	Pack. pcs	Weight kg/100 pcs.	Item No.
946 3 G	3	21.5	4	25	0,345	5301 03 3
946 4 G	4	26.5	5.5	25	0,409	5301 04 1
946 5 G	5	28.5	6.5	25	0,501	5301 00 9
946 6 G	6	30	8	25	0,756	5301 06 8
946 8 G	8	35	10	10	1,228	5301 08 4
946 10 FT	10	43	12.5	10	2,322	5301 10 6
946 3 V4A	3	21.5	4	25	0,210	5301 17 0
946 4 V4A	4	26.5	5.5	25	0,390	5301 17 2
946 5 V4A	5	28.5	6.5	25	0,620	5301 17 4
946 6 V4A	6	30	8	25	0,840	5301 17 6
946 8 V4A	8	35	10	10	1,880	5301 18 0
946 10 V4A	10	43	12.5	10	3,560	5301 18 4

St Steel V4A Stainless steel, grade 316

/100 pc.

G Electrogalvanised FT Hot-dip galvanised


Cable eye stiffener to DIN 65457.

Tensioning wire clip

Type	Bolt	Pack. pcs	Weight kg/100 pcs.	Item No.
1020 11-16 G	M4 x 13	50	1,420	1404 16 4
1020 14-18 G	M4 x 13	50	1,650	1404 18 0
1020 18-28 G	M4 x 13	50	2,000	1404 28 8
1020 11-16 V4A	M4 x 14	50	1,420	1404 16 8
1020 14-18 V4A	M4 x 14	50	1,650	1404 18 4
1020 18-28 V4A	M4 x 14	50	2,000	1404 29 2

Sl Steel V4A Stainless steel, grade 316 Ti /100 pc.
G Electrogalvanised

To fasten cables to tensioning cables. With bolt M4x13.



Dimensions

D1 mm	D2 mm	A mm
11-16	4-9	22
14-18	4-9	26
19-28	4-9	34


Tensioning wire clip, polystyrene



Type	Clamping range D mm	For rope-Ø mm	Bolt	Pack. pcs	Weight kg/100 pcs.	Item No.
4024 9-16	9 - 16	3 - 8	M4 x 13	100	0,545	2305 15 1
4024 16-23	16 - 23	5 - 10	M5 x 20	50	0,930	2305 23 2

PS Polystyrene /100 pc.

Bolt, steel, electrogalvanised, light grey.



Dimensions

D1 mm	D2 mm	A mm	B mm	b mm	M
9-16	3- 8	41	24	14	M4 x 13
16-23	5-10	55	31.5	15	M5 x 20

Fix ISO tensioning wire clip




Type	Clamping range D mm	For rope-Ø mm	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
4021 K 6-13	6 - 13	4 - 9	1000	100	1,295	2307 61 8
4021 K 9-16	9 - 16	4 - 9	1200	100	1,457	2307 63 4
4021 K 6-13 V4A	6 - 13	4 - 9	1000	100	1,295	2307 62 2
4021 K 9-16 V4A	9 - 16	4 - 9	1200	100	1,457	2307 63 8

Sl Steel V4A Stainless steel, grade 316 Ti /100 pc.

FS Strip-galvanised

Metal clip with plastic insert, steel, electrogalvanised, polyethylene inserts.




Dimensions

D1 mm	D2 mm	A mm	b mm	b1 mm
6-13	4-9	21.5	11.5	16
9-16	4-9	26	14	18.3



Wire cable clamp



Type	For	Dim.	Dim.	Dim.	Pack.	Weight	Item No.
	rope-Ø	A	B	C			
	mm	mm	mm	mm	pcs	kg/100 pcs.	
947 3 F	3	20	4	4	25	1,061	5302 02 1
947 5 F	5	24	6	5	25	1,404	5302 05 6
947 6 F	6	28	8	5	25	1,704	5302 06 4
947 8 F	8	34	9	6	10	3,104	5302 08 0
947 10 F	10	42	11	8	10	6,500	5302 10 2
947 3 V4A	3	20	4	4	25	1,090	5302 17 0
947 5 V4A	5	24	6	5	25	1,500	5302 17 4
947 6 V4A	6	28	8	5	25	2,080	5302 17 8
947 8 V4A	8	34	9	6	10	3,390	5302 18 2
947 10 V4A	10	42	11	8	10	6,310	5302 18 8


TG Cast iron V4A Stainless steel, grade 316

/100 pc.

F Hot-dip galvanised

Wire cable clamp for fastening steel wire tensioning ropes.

Wire cable clamp



Type	For	Bolt	Pack.	Weight	Item No.
	rope-Ø				
	mm		pcs	kg/100 pcs.	
261 3-6 G	3 - 6	M6 x 12	100	1,498	5305 01 2
261 3-6 V4A	3 - 6	M6 x 12	100	1,498	5305 01 6


St Steel V4A Stainless steel, grade 316 Ti

/100 pc.

G Electrogalvanised

Wire cable clamp for fastening steel wire tensioning ropes.

Cable lock



Type	For	Dim.	Dim.	Dim.	Breaking	Pack.	Weight	Item No.
	rope-Ø	L	B	H				
	mm	mm	mm	mm	load	pcs	kg/100 pcs.	
944 RZS 2 G	2 - 2.5	26.6	17.1	12.5	0.6	25	2,130	5300 01 5
944 RZS 3 G	2.5 - 3.5	36.4	24.3	14.9	1.2	25	5,120	5300 01 9

Zn Die-cast zinc

/100 pc.

Cable lock for the flexible and easily readjustable suspension with steel wire tensioning rope, type 957. The system allows suspensions in different angles.

Loads, installation strip

When two loads are combined, the value of the worst case applies. In addition, the table values only apply under the following conditions:

- In perforated strip 5055, loads may only be applied in the round holes.
- If placing a bolt in the last hole, always ensure that there is one full bar left above the hole.

- The right sizes of bolt for the perforated strip must be used (M5 for size I, M6 for size II, M8 for size III).
- The bolts must be tightened. The user of smaller or loose bolts causes a strong drop in the breaking load.




Breaking loads

Type	Art. No.	Load 1	Load 2	Load 3	Load 4
5055	1470 12 4	2150 N	1850 N	1650 N	3700 N
	1470 17 5	3050 N	2000 N	1800 N	4000 N
	1470 26 4	6750 N	6750 N	3300 N	13500 N
5055/L	1471 12 0	1150 N	1400 N	1200 N	2800 N
	1471 17 1	2200 N	1500 N	1300 N	3000 N
	1471 26 0	5350 N	2800 N	2400 N	5600 N
5055/ L PE	1473 22 0	1500 N	1500 N	1300 N	3000 N
	1473 27 1	2300 N	2300 N	1700 N	4600 N
	1473 36 0	4700 N	4250 N	4000 N	8500 N
5062	1475 12 6	1600 N	1600 N	2150 N	3200 N
	1475 17 7	2350 N	2350 N	3050 N	4700 N
	1475 26 6	4700 N	4700 N	3700 N	9400 N
5062/L	1475 62 2	1300 N	1300 N	1300 N	2600 N
	1475 67 3	1650 N	1650 N	1300 N	3300 N
	1475 76 2	3800 N	3800 N	3200 N	7600 N



Perforated steel strap



Type	Dimension mm	Dim. d mm	Dim. A mm	per roll m	Pack. pcs	Weight kg/100 pcs.	Item No.
5055 I12 FS	12 x 1	5.2	14.4	10	1	73,000	1470 12 4
5055 II17 FS	17 x 1	6.5	20	10	1	106,000	1470 17 5
5055 III26 FS	26 x 1,2	8.5	25	10	1	204,500	1470 26 4
5055 LI12 FS	12 x 0,75	5.2	14.4	10	1	59,000	1471 12 0
5055 LII17 FS	17 x 0,75	6.5	20	10	1	84,200	1471 17 1
5055 LIII26 FS	26 x 1	8.5	25	10	1	172,300	1471 26 0


St Steel

FS Strip-galvanised

/pc.

Perforated steel strap, in practical uncoiling box.

Perforated steel strap, ridged



Type	Dimension mm	Dim. d mm	Dim. A mm	per roll m	Pack. pcs	Weight kg/100 pcs.	Item No.
5062 I12 FS	12 x 1	5	14	10	1	69,000	1475 12 6
5062 II17 FS	17 x 1	7	20	10	1	98,500	1475 17 7
5062 III26 FS	26 x 1,2	9	25	10	1	183,000	1475 26 6
5062 LI12 FS	12 x 0,75	5	14	10	1	57,000	1475 62 2
5062 LII17 FS	17 x 0,75	7	20	10	1	73,000	1475 67 3
5062 LIII26 FS	26 x 1	9	25	10	1	153,000	1475 76 2


St Steel

FS Strip-galvanised

/pc.

Perforated strap with wavy edges, in practical uncoiling box.

Perforated steel strap, plastic-coated



Type	Dimension mm	Dim. d mm	Dim. A mm	per roll m	Pack. pcs	Weight kg/100 pcs.	Item No.
5055 L PE I 14	14 x 3	5.2	12	10	1	70,000	1473 22 0
5055 L PE II 19	19 x 3	6.5	15	10	1	100,500	1473 27 1
5055 L PE III 28	28 x 3,7	8.5	20	10	1	167,500	1473 36 0

St Steel

FSK Strip galvanised/powder-coated

/pc.

Perforated steel strap with PE plastic jacketing.